Series 6, built-under fridge, 82 x 60 cm, flat hinge
KUR15AFF0







KFZ10AX0	Door panel with decor frame
KUZ20SX0	Attachment door, stainless steel

The built-under refrigerator with MultiBox: ideal storage location for your fresh fruits and vegetables.

- **LED interior light**: Illuminates the refrigerator evenly and glare-free, and lasts for its entire life.

Gross weight: ..... 82.000 lbs
Energy Efficiency Class (Regulation (EU) 2017/1369): ..... F
Average annual energy consumption in kilowatt hour per year (kWh/a) (EU) 2017/1369: .....114 kWh/annum
Sum of volume of frozen compartments (EU 2017/1369): ..... 0 l
Sum of volume of chill- and unfrozen compartments (EU 2017/1369): ..... 137 l
Airborne acoustical noise emissions (EU 2017/1369): .38 dB(A) re 1 pW
Airborne acoustical noise emission class (EU 2017/1369): C
Built-in / Free-standing: ..... Built-in
Number of compressors: 1
Number of independent cooling systems: 1
Width of the appliance: .....598 mm
Height: ..... 820 mm
Depth of the product: ..... 548 mm
Net weight: .....34.3 kg
Min. required niche size for installation (HxWxD): ....820 x 600 x 550 mm
Door panel options: ..... Possible but accessory
Door hinge: ..... Right reversible
Number of Adjustable Shelves in fridge compartment: 2
Shelves for Bottles: ..... No
Frost free system: .....No
Interior ventilator: ..... No
Reversible Door Hinge: .....Yes
Length electrical supply cord: ..... 230.0 cm
Noise level: .....38 dB(A) re 1 pW
Multi-Flow Air Tower: ..... No
Economy setting: ..... No
Cold technology: ..... 1 compressor/1 cold circuit
Fast cooling switch: .....No
Temperature Controlled Drawer: .....No
Humidity Control Drawer: .....No
Number of Door Bins - Refrigerator: 3
Door bin adjustability - Refrigerator: ..... No
Tilt-out door bins in fridge: .....Yes
Gallon wide door bins: .....Yes
Number of Gallon storage: 3
Motorized Shelf: ..... No
Material ofthe shelves: ..... Glas, plastic
Door opened indicator freezer: .....No
Connection rating: ..... 90 W
Fuse protection: .....10 A
Voltage: ..... 220-240 V
Frequency: ..... 50 Hz
Door panel options: ..... Possible but accessory
Installation typology: .....Built-under
Noise level: .....38 dB(A) re 1 pW
Energy Star Qualified: .....No
Plug type: ..... Gardy plug w/ earthing
Required cutout/niche size for installation (in): x
Dimensions of the packed product: ..... 35.03 x 26.37 x 24.40
Net weight: .....76.000 lbs

Series 6, built-under fridge, 82 x 60 cm, flat hinge
KUR15AFF0

The built-under refrigerator with MultiBox: ideal storage location for your fresh fruits and vegetables.

Performance and consumption

- can be built under/between, fully integr

Design and Styling

- Ventilation in plinth, no cut-out in the worksurface necessary
- Easy clean interior

Convenience & Safety

- Electromechanical temperature control
- Automatic defrost in fridge section

Fridge Compartment

- 3 safety glass shelves, of which 2 are height adjustable
- 3 door trays
- Bottle holder in x-deep door tray
- LED interior light

Freshness System

- 2 MultiBox drawers - Transparent drawers with a corrugated bottom, ideal for storing fruits and vegetables.

Technical Information

- Door right hinged, reversible
- Connected load: 90 W
- Nominal voltage: 220 - 240 V

Dimensions

- Niche Dimension (H x W x D): 82.0 cm x 60.0 cm x 55.0 cm
- Dimensions (H x W x D): 82.0 cm x 59.8 cm x 54.8 cm

Accessories

- egg tray


Country Specific Options

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

General Information


Series 6, built-under fridge, 82 x 60 cm, flat hinge
KUR15AFF0

measurements in mm
Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3


The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.

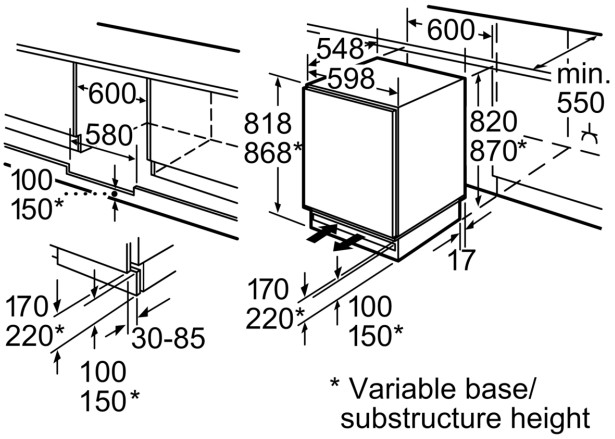

* Variable base/ substructure height

Space for electrical connection next to the appliance on the left or right-hand side.
Ventilation space in the base.

Measurements in mm



Maximal permissible weight of the unit fronts

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges
Weight
A: Appliance door height including hinges in mm

B: Undamped hinge, unit front in kg

C: Damped hinge, unit front in kg

D: Additional possible load in kg with heavy load kit

A	B	C	D
1500-1750	22	22	B+5 / C+5
720-1400	19	19	
A1	15	19	
A2	15	19	